

CRAWL SPACE

Film-Faced Molded Polystyrene Insulation.

R-Shield® PLUS is a film-faced insulation with built in code compliant air and weather resistant barrier performance. R-Shield PLUS is a film-faced insulation manufactured to provide architects, specifiers, distributors, and contractors all the features and benefits inherent in a high quality insulation.

- Air Barrier
- Weather Resistive Barrier
- Low water vapor permeability
- R-value that never changes and is stable over time
- Range of compressive strengths available

Strength/R-value.

R-SHIELD PLUS	Compressive Strength ¹ , psi	R-value/inch ²	
		75°F ³	40°F ⁴
100	10	3.9	4.2
130	13	3.9	4.3
150	15	4.2	4.6
250	25	4.4	4.8

¹ Compressive strength @ 10% deformation.

² R-value units are °F·ft²·h/Btu.

³ Recommended for design in WARM climates.

⁴ Recommended for design in COLD climates.

⁵ R-Shield PLUS is available with a foil face. A foil face exposed to a cavity wall air space provides approximately an additional R-value of 2.0.

R-Shield PLUS is available in a wide range of standard R-values and thicknesses to meet your needs.


R-5, R-7.5, R-10, R-15

Product thicknesses for standard boards are provided in the R-Shield PLUS Thickness Selector. Project requirements vary, so R-Shield PLUS can be ordered in any R-value thicknesses to meet your needs.

Proven to meet, or exceed, building codes.

R-Shield PLUS is manufactured under an industry leading quality control program monitored by UL and further recognized in UL Evaluation Report UL ER40361-01 and ICC ESR-4743. R-Shield PLUS meets ASTM C578, "Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation".

Approved for use in crawl spaces without a thermal barrier or ignition barrier.

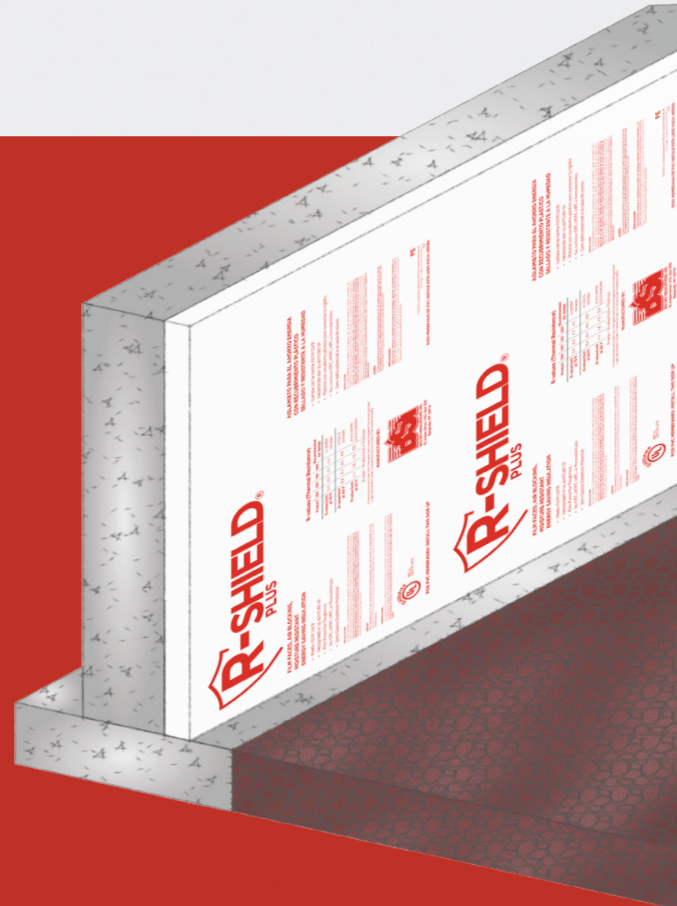

FOAM FACTS:

R-Shield PLUS outperforms XPS.

- R-Shield PLUS and XPS meet weather resistance barrier requirements
- R-Shield PLUS provides a stable long-term R-value at a lower cost
- R-Shield PLUS uses a blowing agent with 10 x lower global warming potential and 10,000 x lower ozone depletion
- R-Shield PLUS meet strength requirements at a lower cost
- R-Shield PLUS with termite treatment available to provide termite resistance

Performance Value.

When you consider all performance characteristics and cost, R-Shield PLUS is your best choice for weather resistive barrier insulation.

R-Shield PLUS has air in its closed cells and therefore has a stable R-value. Many other insulations use blowing agents that cause R-value loss and are harmful to the environment.

R-Shield PLUS has compressive strength to meet specific project requirements.

R-Shield PLUS is manufactured to resist moisture absorption in wetting conditions and release absorbed moisture quickly during drying periods, which means R-Shield PLUS maintains R-value.

Termite Resistant.

One of the most destructive forces anywhere is termites. R-Shield PLUS can be manufactured with a proven and safe additive, that effectively resists termites.

R-Shield PLUS is treated to meet ICC ES AC239, "Acceptance Criteria for Termite-Resistant Foam Plastics".

Recyclable.

After it's life as a building insulation, R-Shield PLUS is 100% recyclable. It can be ground into granules and reincorporated into new R-Shield PLUS products or it can be thermally processed into a resin that's used to manufacture other new products.

Ready to take control? Start here.

If you're ready to have R-Shield contribute to your next project, just contact your Premier Building Systems Technical Sales Representative. They will be happy to give you design consultation, information about R-Shield products, pricing, and answers to all of your questions.

A PRODUCT OF
PREMIER
BUILDING SYSTEMS



www.rshieldinsulation.com | 800-766-3626

Copyright © 2022. R-Shield is a registered trademark of Premier Building Systems. RSI P505 08/22