

# FANFOLD SIDING UNDERLAYMENT


## Film-Faced Expanded Polystyrene Insulation.

R-Shield® PLUS is a film-faced insulation with built in code compliant air and weather resistant barrier performance.

R-Shield PLUS is a film-faced insulation manufactured to provide architects, specifiers, distributors, and contractors all the features and benefits inherent in a high quality insulation.

- Air Barrier
- Weather Resistive Barrier
- Low water vapor permeability
- R-value that never changes and is stable over time
- Range of compressive strengths available

## Strength/R-value.

	Compressive Strength <sup>1</sup> , psi	R-value	
		75°F <sup>3</sup>	40°F <sup>4</sup>
<b>100</b>	10	1.9	2.1
<b>130</b>	13	2.0	2.1
<b>150</b>	15	2.1	2.3
<b>250</b>	25	2.2	2.4

<sup>1</sup> Compressive strength @ 10% deformation.

<sup>2</sup> R-value units are °F·ft<sup>2</sup>·h/Btu and are for 1/2 inch thickness

<sup>3</sup> Recommended for design in WARM climates.

<sup>4</sup> Recommended for design in COLD climates.

R-Shield PLUS is available in a 4' x 50' fan-fold configuration with standard thicknesses to meet your needs.

**3/8" & 1/2"**


## Proven to meet, or exceed, building codes.

R-Shield PLUS is manufactured under an industry leading quality control program monitored by UL and further recognized in UL Evaluation Report UL ER40361-01 and ICC ESR-4743. R-Shield PLUS meets ASTM C578, "Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation".



## Stands up to the weather.

When tested in accordance with ASTM C1512, "Standard Test Method for Characterizing the Effect of Exposure to Environmental Cycling on Thermal Performance of Insulation Products" R-Shield PLUS maintains its R-value and strength after severe exposure to freeze-thaw cycles.

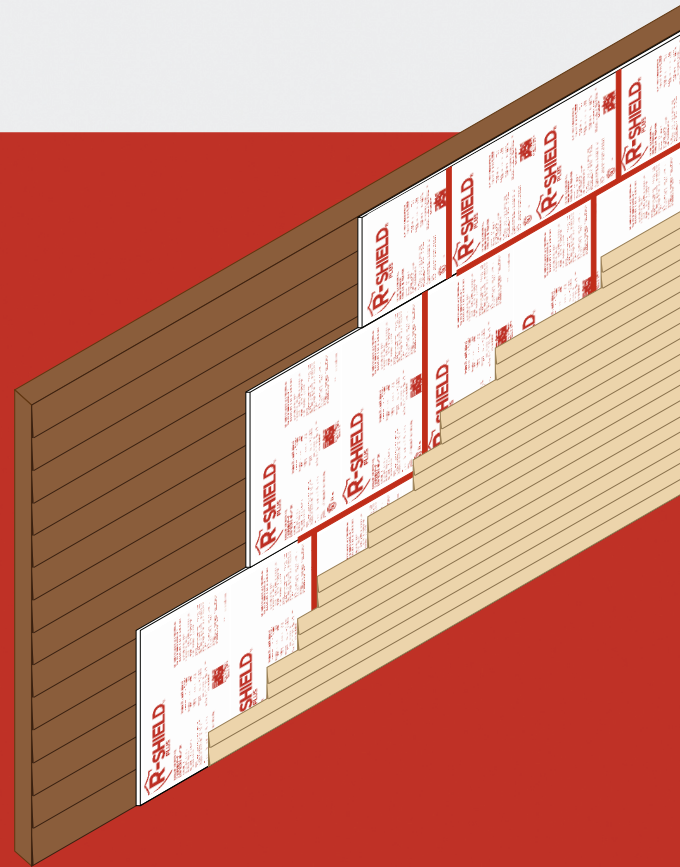

## FOAM FACTS:

### R-Shield PLUS outperforms XPS.

- R-Shield PLUS and XPS meet weather resistance barrier requirements
- R-Shield PLUS provides a stable long-term R-value at a lower cost
- R-Shield PLUS uses a blowing agent with 10 x lower global warming potential and 10,000 x lower ozone depletion
- R-Shield PLUS meet strength requirements at a lower cost
- R-Shield PLUS with termite treatment available to provide termite resistance

## **Performance Value.**

When you consider all performance characteristics and cost, R-Shield PLUS is your best choice for weather resistive barrier insulation.

R-Shield PLUS has air in its closed cells and therefore has a stable R-value. Many other insulations use blowing agents that cause R-value loss and are harmful to the environment.

R-Shield PLUS has compressive strength to meet specific project requirements.

R-Shield PLUS is manufactured to resist moisture absorption in wetting conditions and release absorbed moisture quickly during drying periods, which means R-Shield PLUS maintains R-value.

## **Termite Resistant.**

One of the most destructive forces anywhere is termites. R-Shield PLUS can be manufactured with a proven and safe additive, that effectively resists termites.

R-Shield PLUS is treated to meet ICC ES AC239, "Acceptance Criteria for Termite-Resistant Foam Plastics".

## **Recyclable.**

After it's life as a building insulation, R-Shield PLUS is 100% recyclable. It can be ground into granules and reincorporated into new R-Shield PLUS products or it can be thermally processed into a resin that's used to manufacture other new products.

## **Ready to take control? Start here.**

If you're ready to have R-Shield contribute to your next project, just contact your Premier Building Systems Technical Sales Representative. They will be happy to give you design consultation, information about R-Shield products, pricing, and answers to all of your questions.

A PRODUCT OF  
**PREMIER**  
BUILDING SYSTEMS



[www.rshieldinsulation.com](http://www.rshieldinsulation.com) | 800-766-3626

Copyright © 2022. R-Shield is a registered trademark of Premier Building Systems. RSI P506 08/22